



Hammond  
Power Solutions

GUELPH, ONT. BARABOO, WI COMPTON, CA MONTERREY, MX




® LR 3902  
DRY TYPE  
TRANSFORMER  
77U5  
E112313

LISTED

THREE PHASE DRY TYPE AUTOTRANSFORMER  
AUTOTRANSFORMATEUR SEC TRIPHASE

HV/HT	600Y/346V 480Y/277V			Cust. Ref. Réf. du client	
BIL	-			Serial No. No. de série	
TERM. BORNES	H0 H1 H2 H3 H4 H5 H6			Part No. No. de pièce	Y075QTCH3LOU
	VOLTS	CURRENT COURANT	% RATED VOLTAGE % TENSION NOMINALE	CONNECTION EACH PHASE CONNEXION PAR PHASE	kVA
	600Y/346V 480Y/277V	72.2 90.2		H0 H1 H2 H3 H0 H4 H5 H6	75
	400Y/231V 240Y/139V 208Y/120V	108.3 180.4 208.2		X0 X7 X8 X9 X0 X4 X5 X6 X0 X1 X2 X3	TYPE
					K
					Cooling Refroidissement
					ANN
					Temp. Rise Echauffement
					150 °C
					Temp. Class Classe de Temp.
					220 °C
					Frequency Fréquence
					60 Hz
					Impédance % @ 170 °C
					2.5
LV/BT	208Y/120V 240Y/139V 400Y/231V			Encl. Type Type de boîtier	3R
BIL	-			Wt LBS Poids en lbs.	400
TERM. BORNES	X0 X1 X2 X3 X4 X5 X6 X7 X8 X9			Winding Enroulement	CU



0003302b1

HAM3656

SPACINGS BETWEEN ANY VENTILATED ENCLOSURE PANEL AND ANY ADJACENT WALL SHALL BE A MINIMUM OF 5 INCHES EXCEPT WHEN WALL MOUNTED USING HPS WALL MOUNTING KIT

VOLTAGES SHOWN ARE FOR 3 PHASE, 4 WIRE SYSTEMS. NEUTRAL AND GROUND CONNECTIONS SHOULD BE MADE IN ACCORDANCE WITH LOCAL ELECTRICAL CODE AND STANDARDS REQUIREMENTS



8 03423 13698 7



Hammond Power  
Solutions Inc.


TITLE: 3PH AUTO TRANSFORMER  
NAMEPLATE INFORMATION

				DES: RMOVVA
				DATE: 10/04/13
NO.	DATE	BY	REVISION	SCALE: NTS

SHEET 1 OF 2

EDB Y075QTCH3LOU

0.1 wong 2017/07/07 14:41

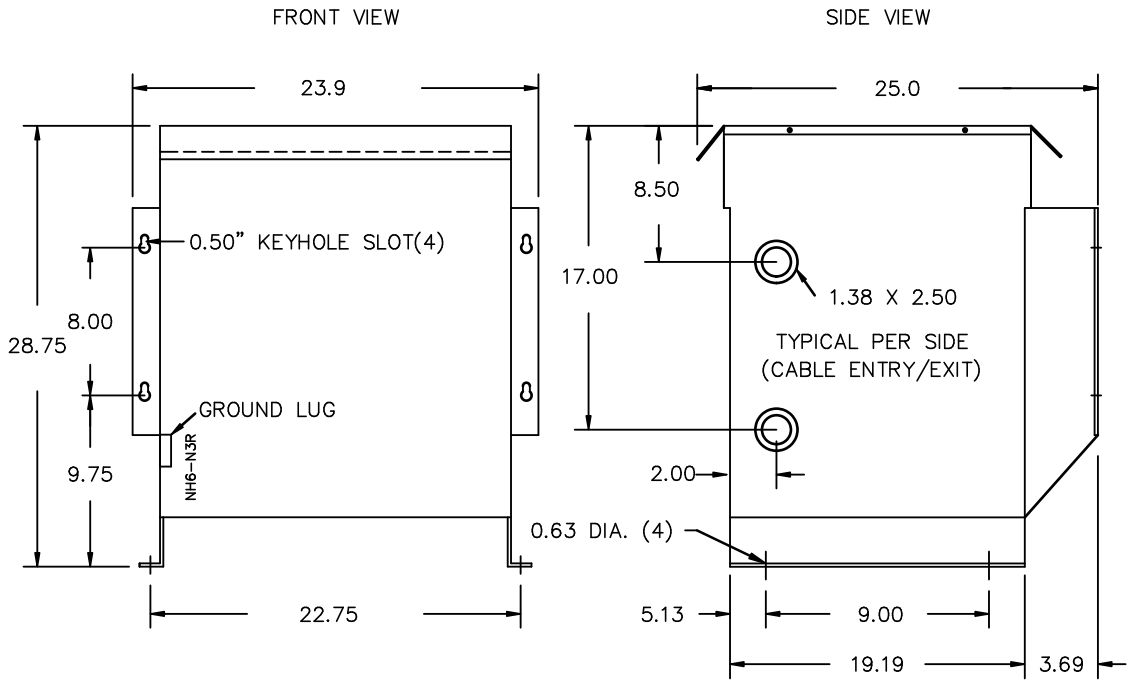

All Dimensions in inches

ENCLOSURE COLOR : ANSI 61 GREY – OUTDOOR

H.V.1. TERMINAL DETAIL

L.V.1. TERMINAL DETAIL

H.V.2. TERMINAL DETAIL

L.V.2. TERMINAL DETAIL

MECHANICAL TYPE LUGS INCLUDED  
SUITABLE FOR #2/0-14 CU/AL  
CONDUCTORS  
1 CONDUCTOR PER PHASE

MECHANICAL TYPE LUGS INCLUDED  
SUITABLE FOR 600MCM-2 CU/AL  
CONDUCTORS  
1 CONDUCTOR PER PHASE

MECHANICAL TYPE LUGS INCLUDED  
SUITABLE FOR #2/0-14 CU/AL  
CONDUCTORS  
1 CONDUCTOR PER PHASE

MECHANICAL TYPE LUGS INCLUDED  
SUITABLE FOR 600MCM-2 CU/AL  
CONDUCTORS  
1 CONDUCTOR PER PHASE

CUSTOMER NOTES:

- HV1 TERMINATED AT TOP FRONT
- LV1 TERMINATED AT BOTTOM FRONT
- HV2 TERMINATED AT TOP FRONT
- LV2 TERMINATED AT BOTTOM FRONT
- LV3 TERMINATED AT TOP FRONT



TITLE: 3PH AUTO TRANSFORMER

				DES: RMOVVA
				DATE: 10/04/13
NO.	DATE	BY	REVISION	SCALE: NTS

SHEET 2 OF 2

EDB Y0750TCH310U

0.1 w Wong 2017/07/07 14:41